

# iRespond NG NOW

## What is iRespond NOW?


iRespond-Now is a simplified version of iRespond Instructor-Paced Sessions. It allows you to send questions “on the fly” for any preexisting content regardless of media (BrainPop, Word, web site, PDF, PowerPoint, etc.). Here is a little more information:

- Issue questions with iRespond-Now using whatever content you are showing your students or audience.
- There is no need to prepare or import anything -- simply send your questions based on what is displayed.
- iRespond-Now scores and grades answers instantly.
- The iRespond-Now toolbar “floats” over any software or content program you choose to use.
- iRespond-Now allows you to use content from other sources – CD’s, Web sites, video or audio files and more.

## TEACHER’S ACCOUNT

**Note: Username and password is case sensitive.**

1, Launch **iRespond NOW**. (Double click on icon)




2. Login credentials will have been pushed to your computer.  
Username: uppercase **badgeID** (ex: ABC18571)  
Password: **“teacher”** (lowercase, no quotes)



## IRESPOND NOW - - POLLING/SURVEY CLASS (NO RIGHT OR WRONG ANSWER)

1. Select your **Class** and click **Next**.
2. Select your **Remotes** and click **Next**.
3. Connect the base unit.
4. Turn on the base unit and when found, click **Next**.
5. The iRespond NOW toolbar will appear in the window.

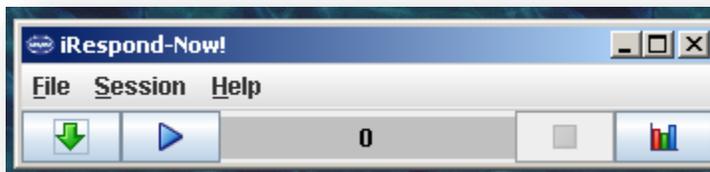

6. Instruct students to turn on their remotes, enter their PIN (student ID) and press **Send**. When the students press the Send button they will see “Login Sent and then Login Accepted.”
7. The iRespond NOW toolbar will indicate how many students are logged on. Click **Session** → **Show Users**


to see the list of students.

8. To send a POLLING/Survey question, **click on the blue Play Button** to send the question to the student remotes.
9. Ask the students the question &/or display the question. Students will enter their answer on the remotes. They are not able to change their answers using iRespond NOW.
10. Once 100% of the students complete the question, a bar graph displaying the results will appear.
11. **Continue step #8-10** to ask survey/poll questions.

## IRESPOND NOW – ASKING RIGHT OR WRONG QUESTION

To send questions to student remotes that have one correct answer (multiple choice, True or False, or Fill-In-The Blank number answers.

1. Select your **Class** and click **Next**.
2. Select your **Remotes** and click **Next**.
3. Connect the base unit.
4. Turn on the base unit and when found, click **Next**.
5. The iRespond NOW toolbar will appear in the window.

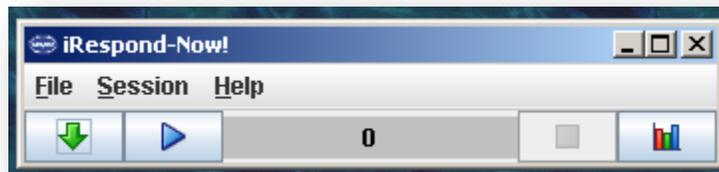

6. Instruct students to turn on their remotes, enter their PIN (student ID) and press **Send**. When the students press the Send button they will see “Login Sent and then Login Accepted.”
7. The iRespond NOW toolbar will indicate how many students are logged on. Click **Session → Show Users** to see the list of students.
8. Teacher will create a Teacher Remote.

### Entering Answers Using a Teacher Remote

*Using a teacher remote to enter answers will allow you to enter answers without the students seeing the correct answers.*

- A. Turn on your remote, enter 1234 and press **Send**.
- B. Select **GO**.
- C. Select answer.
- D. Press **Send**.

**NOTE:** Teacher will **repeat steps B– D** each time a teacher asks a question.

9. Ask the students the question &/or display the question. Students will enter their answer on the remotes. They are not able to change their answers using iRespond NOW.
10. Once 100% of the students complete the question, a bar graph displaying the results will appear.
11. **Continue step #8-10** to ask questions.